

PRICE LIST

Effective From 13.02.2026

Load Break Switch



DC Isolators



Cable Ducts



Relays / Relay Modules



Terminals



Limit Switches



Plugs & Sockets



Agri Contactors



DP Contactors



MCB's



DC MCB's



SPD / Combiner Box



salzer



Established in 1985 in a time-bound collaboration with Saelzer Schaltegerate Fabrik GmbH to manufacture rotary switches, and headquartered in Coimbatore, Salzer has grown into an independent multi-product entity with a wide basket of Electrical Products, covering a variety of applications for the Domestic, Industrial & Automobile segments.

With a wide network and business association with a major engineering conglomerate on specific product ranges in domestic market, Salzer products are also available as a preferred choice in over 40 countries worldwide.



Contents

Load Break Switches	4
DC Isolators & Changeover	7
Cable Ducts	8
Halogen Free Ducts	9
Relays & Relay Modules	10
Terminal Connectors	16
Limit Switches	20
Plugs & Sockets	22
MCB ISI / IEC	27
MCB UL	29
RCCB	31
DC MCB / Solar Combo	32
Surge Protection Device (SPD) & Combiner Box	33
Agri Contactors	34
Definite Purpose (DP) Contactors	35
Flexible Busbar	36

Rotary Switches are Marketed by



GST 18%

AC ON LOAD ISOLATORS (8536)

- AC23 Utilization Category
- **Range from 16-125 Amps upto 8 pole**
- Multiple mounting options, ABS/ Aluminium/ sheet steel enclosures / IP65 / NEMA Rated
- Add on pole Power / Neutral and Auxiliary pole
- **Changover switches from 25-125 Amps upto 4 poles**
Confirms to IEC 60947-1 & 3, EN 60947- 3, UL60947-4-1

LB 3 Pole ON - OFF Switches

Description	Cat. No.	Can also be given on request	M.R.P. (₹) Per Unit								
			16A	20A	25A	32A	40A	63A	80A	100A	125A
Single Hole MTG Switch with Flag Knob	LBX32300B19FPYR		982	1002	*	*	*	*	*	*	*
Front Panel MTG with Flag Knob	LBX32300B40FPYR		955	982	*	*	*	*	*	*	*
Front Panel MTG with B03 (48x48) Plate	LBX32300B03FLYR	32309	873	894	968	1002	1152	1235	*	*	*
Front Panel MTG with B13 (64x64) Plate with Flag Knob	LBX32300B13FLYR	32306 / 32309	873	894	968	1002	1152	1235	3123	3918	4921
Front Panel MTG with B13 (64x64) Plate with BG Handle	LBX32300B13BGYR	32309	*	*	1065	1101	1246	1317	*	*	*
DIN Rail MTG Switch with Flag Knob	LBX32300B23FLGB		*	*	968	1002	1152	1235	*	*	*
Rectangular Pad Lock Switch with TDYR	LBX32300B30TDYR		*	*	1172	1235	1355	1426	*	*	*
Round Pad Lock Switch with RDYR	LBX32309B33RDYR		955	981	1065	1101	1246	1317	3386	4226	5281
Switch with B63 Lock & Key Version	LBX32309B63TDYR		*	*	1619	1693	1834	1883	*	*	*
Base MTG Switch with DIL and Pad Lock	LBX32309MB34RDYR		1525	1572	1693	1786	1860	2002	4511	5632	7041
Base MTG Switch with BG Handle	LBX32309MB42BGYR		1525	1572	1693	1786	1860	2002	4511	5632	7041
Switch in Polycarbonate Enclosure - in B31SM	LBX32300B31SMRDYR		1935	1993	2135	2208	*	*	*	*	*
Switch in Polycarbonate Enclosure - in B31M	LBX32309B31MRDYR		*	*	*	*	2415	2476	*	*	*
Switch in Polycarbonate Enclosure - in B31L with Leech Handle	LBX32309B31LLHYR		*	*	*	*	*	*	6354	7488	8886
Switch in SS Enclosure - in SB31L with Leech Handle	LBX32309SB31LLHYR		*	*	*	*	*	*	6354	7488	8886

LB 4 Pole ON - OFF Switches

Description	Cat. No.	Can also be given on request	M.R.P. (₹) Per Unit								
			16A	20A	25A	32A	40A	63A	80A	100A	125A
Single Hole MTG Switch with Flag Knob	LBX32400B19FPYR		1220	1248	*	*	*	*	*	*	*
Front Plate MTG with Flag Knob	LBX32400B40FPYR		1199	1220	*	*	*	*	*	*	*
Front Panel MTG with B03 (48x48) Plate	LBX32400B03FLYR	32409	1113	1137	1236	1271	1487	1572	*	*	*
Front Panel MTG with B13 (64x64) Plate with Flag Knob	LBX32400B13FLYR	32406 / 32409	1113	1137	1236	1271	1487	1572	3834	4810	6028
Front Panel MTG with B13 (64x64) Plate with BG Handle	LBX32400B13BGYR	32409	1332	1367	1584	1657	*	*	*	*	*
DIN Rail MTG Switch with Flag Knob	LBX32400B23FLGB		*	*	1236	1271	1487	1572	*	*	*
Rectangular Pad Lock Switch with TDYR	LBX32400B30TDYR		*	*	1437	1498	1689	1764	*	*	*
Round Pad Lock Switch with RDYR	LBX32409B33RDYR		1199	1220	1332	1367	1584	1657	3918	4892	6116
Switch with B63 Lock & Key Version	LBX32409B63TDYR		*	*	1883	1958	2170	2221	*	*	*
Base MTG Switch with DIL and Pad Lock	LBX32409MB34RDYR		1764	1812	1958	2050	2200	2343	5224	6522	8150
Base MTG Switch with BG Handle	LBX32409MB42BGYR		1764	1812	1958	2050	2200	2343	5224	6522	8150
Switch in Polycarbonate Enclosure - in B31SM	LBX32400B31SMRDYR		2170	2235	2415	2474	*	*	*	*	*
Switch in Polycarbonate Enclosure - in B31M	LBX32409B31MRDYR		*	*	*	*	2750	2812	*	*	*
Switch in Polycarbonate Enclosure - in B31L with Leech Handle	LBX32409B31LLHYR		*	*	*	*	*	*	7068	8378	9997
Switch in SS Enclosure - in SB31L with Leech Handle	LBX32409SB31LLHYR		*	*	*	*	*	*	7068	8378	9997
Auxiliary Contact	FM / RM		245	245	303	303	303	303	894	894	894
Add-on Contact Additional Pole	FM / RM		253	263	283	317	369	398	1044	1289	1434

Mounting Details

B13

B33

MB34

B31SM

B31M

B31L

LOAD BREAK SWITCHES

KNOBS & HANDLES

	CODE	TYPE		CODE	TYPE
	TD	Tear Drop Knob		RD	Round Knob, Padlockable
	FL	Flag Knob		RH	Roll Handle, Padlockable
	FP	Flag Knob Padlockable		SH	Short Handle, Padlockable
	PG	Pistol Grip Handle		LH	Leech Handle, Padlockable
	BG	Ball Grip Handle			

EB - GEN Changeover Switches (8536)



B13 Mounting



MB42 Mounting



SB31 Enclosure

3 Pole EB - GEN Changeover Switches

Description	Cat. No.	M.R.P. (₹) Per Unit							
		25A	32A	40A	63A	80A	100A	125A	
3 Pole C/O Front Panel Mounting	EBX31153B13BGYR	2861	2980	3476	3617	*	*	*	
3 Pole C/O Rear Mounting	EBX31153MB42BGYR	3320	3440	4004	4129	7380	9233	11534	
3 Pole C/O in SS Enclosure	EBX31153SB31BGYR	3969	4077	4719	4859	*	*	*	
3 Pole C/O Rear Mounting	EBX31153B21BGYR	3320	3440	4004	4129	7380	9233	11534	
3 Pole C/O Rear Mounting	EBX31153MB34LHYR	3320	3440	4004	4129	7380	9233	11534	
3 Pole C/O in Polycarbonate Enclosure	EBX31153B31LLHYR	3969	4077	4719	4859	*	*	*	
3 Pole C/O in SS Enclosure	EBX31153SB31XLLHYR	*	*	*	*	10429	12269	14570	

4 Pole EB - GEN Changeover Switches

Description	Cat. No.	M.R.P. (₹) Per Unit							
		25A	32A	40A	63A	80A	100A	125A	
4 Pole C/O Front Panel Mounting	EBX31154B13BGYR	3320	3440	4077	4195	*	*	*	
4 Pole C/O Rear Mounting	EBX31154MB42BGYR	3739	3883	4585	4792	9307	11646	14548	
4 Pole C/O in SS Enclosure	EBX31154SB31BGYR	4425	4597	5332	5521	*	*	*	
4 Pole C/O Rear Mounting	EBX31154B21BGYR	3739	3883	4585	4773	9307	11646	14548	
4 Pole C/O Rear Mounting	EBX31154MB34LHYR	3739	3883	4585	4773	9307	11646	14548	
4 Pole C/O in Polycarbonate Enclosure	EBX31154B31LLHYR	4425	4597	5332	5521	*	*	*	
4 Pole C/O in SS Enclosure	EBX31154SB31XLLHYR	*	*	*	*	12355	14677	17597	

Ordering Code for Load Break and Changeover Switches

LB Load Break Switch	EB Changeover Switch	X Current Rating	XXXXX Programme Code	XXXXX Mounting Options	XX Knob Options	XX Colour
-------------------------	-------------------------	---------------------	-------------------------	---------------------------	--------------------	--------------

Example

LB Switches, 63A, 3P, 9 O'clock, 4 hole front mounting, with metal shaft, yellow front plate, red round knob

LB I 32309 MB34 RDYR

LB	I	32309	MB34	RD	YR	Description
						Yellow Front Plate/Red Knob
						64 x 64 Front Plate Round Knob with Padlock (R)
						Metal Shaft with Round Knob with Padlock and Interlock
						3Pole 9 O' Clock "OFF"
						63A
						Load Break Switch

Accessories

X F-Front Mounting	XX MC-Main Module	X 20 - 16A to 20A 32 - 25A to 32A 63 - 40A to 63A 80 - 80A 125 - 100A, 125A & 80A
R-Rear Mounting	NC-Neutral Module	
	AC-Auxiliary Module	

R	NC	32	Description
			32A
			Neutral Module
			Rear Mounting

Rating Selection Table

Ampere (A)	16	20	25	32	40	63	80	100	125
Code (X)	C	D	E	F	G	I	J	K	L

Note : SB31 Enclosure for 25A to 63A ratings, SB31XL Enclosure for 80A to 125A ratings B21 Mounting model is similar to B13 model with links provided on the common side.

*Note : Not able to offer

DC Isolators & Changeover (8536)

DC ISOLATORS



B23 Mounting



B31SMX



B23DB Mounting

AC/DC CHANGEOVER



B21 Mounting



MB34 Mounting

- DC Isolator
- Range 20A to 63A upto 1500 VDC
- Mounting Options: Standard Front Mounting, DB Mounting, Door interlock & Enclosure Mountings

- AC/DC Changeover
- Range 20A to 40A upto 1500 VDC
- Mounting Options: Standard Front Mounting, Door Interlock & Enclosure Mountings available

Description	Cat. No.	AMPS Rating	M.R.P. (₹) Per Unit
		DC21B (Amps)	
	4 POLE ISOLATOR	AMPS Rating @ 1000V DC	
B13 Front MTG with Flag Knob	DC LB216 30409 B13 FLGB	20	2737
	DC LB225 30409 B13 FLGB	25	3111
	DC LB232 30409 B13 FLGB	40	3308
B33 Front MTG with Round Knob, Pad Lock	DC LB216 30409 B33 RDGB	20	2935
	DC LB225 30409 B33 RDGB	25	3308
	DC LB232 30409 B33 RDGB	40	3500
B23 DIN Rail MTG with Flag Knob	DC LB216 30409 B23 FLGB	20	2737
	DC LB225 30409 B23 FLGB	25	3111
	DC LB232 30409 B23 FLGB	40	3308
B23P DIN Rail MTG with Flag Knob, DB Mounting	DC LB216 30409 B23P FLBB	16	2835
	DC LB225 30409 B23P FLBB	25	3209
	DC LB232 30409 B23P FLBB	40	3402
	DC LB216 30409 B23DBP FLBB	16	2806
	DC LB225 30409 B23DBP FLBB	25	3175
	DC LB232 30409 B23DBP FLBB	40	3374
MB34 Base MTG with DIL and Pad Lock	DC LB216 30409 MB34 RDGB	16	2935
	DC LB225 30409 MB34 RDGB	25	3308
	DC LB232 30409 MB34 RDGB	40	3500
SMX In Plastic Enclosure	DC LB216 30409 SMX RDGB	16	3256
	DC LB225 30409 SMX RDGB	25	3632
	DC LB232 30409 SMX RDGB	40	3826
B23 DIN Rail MTG with Flag Knob, DB Mounting	DC LB363 30409B23DBFLGB	63	6841
B23 DIN Rail MTG with Flag Knob	DC LB363 30409B23FLGB	63	6768
8 POLE ISOLATOR		AMPS Rating @ 1000V DC	
B21 DIN Rail MTG with Ball Grip Handle	DC LB216 30809 B21 BGGB	16	5210
	DC LB225 30809 B21 BGGB	25	5697
	DC LB232 30809 B21 BGGB	40	6883
MB34 Base MTG , DIL & Pad Lock with Leech Handle	DC LB216 30809 MB34 LHGB	16	5585
	DC LB225 30809 MB34 LHGB	25	6073
	DC LB232 30809 MB34 LHGB	40	7259
B31L In Plastic Enclosure	DC LB216 30809 B31L SHGB	16	7902
	DC LB225 30809 B31L SHGB	25	8391
	DC LB232 30809 B31L SHGB	40	9576
4 POLE CHANGEOVER		AMPS Rating @ 1000V DC	
B21 DIN Rail MTG with Ball Grip Handle	DC LB216 30154 B21 BGGB	16	5210
	DC LB225 30154 B21 BGGB	25	5697
	DC LB232 30154 B21 BGGB	40	6883
MB34 Base MTG , DIL & Pad Lock with Leech Handle	DC LB216 30154 MB34 LHGB	16	5585
	DC LB225 30154 MB34 LHGB	25	6073
	DC LB232 30154 MB34 LHGB	40	7259
B31L In Plastic Enclosure	DC LB216 30154 B31L SHGB	16	7902
	DC LB225 30154 B31L SHGB	25	8391
	DC LB232 30154 B31L SHGB	40	9576

* Note : 2 Pole Isolators can also be supplied on request

FRLS Cable Ducts (8538)

salzer

The flammability and smoke performance of rigid PVC (RPVC) plays a significant role in its selection for wiring duct applications. One of the most serious problems of general RPVC cable duct combustion is that it produces large volume of smoke and toxic gases which became the main cause of fire related death. Apart from the irritant effect of HCl gas on the eyes and respiratory system, smoke can cause disorientation and hinder escape from the scene of the fire; which impedes the entry of fire fighters. Hence, the reduction of smoke emissions is clearly desirable.

Salzer FRLS PVC Cable Ducts efficiently carries and protects wires and cables, which are manufactured from specially compounded, low smoke, flame retarded and high impact rigid polyvinyl chloride (RPVC) resin. We modified RPVC wiring duct formulations and used low doses of plasticizer and lubricants to get higher limiting oxygen index (LOI) and low smoke density rating (SDR) with excellent flame retardant (V-0) characteristics. Our wiring duct offers an effective resistance against fire propagation and emits very negligible amount of smokes during fire catching. Salzer cable duct has a flammability rating of V-0, REACH and RoHS compliant and has a continuous use temperature up to 140°F (60 °C). Wide range of colour, sizes and different slotting styles to meet the customer requirements.

Type A	Description	1 Meter				2 Meter			
	H x W	Cat. No.(Standard slot Grey)	M.R.P.(₹) Per Unit	Std. Pkg.	Min Order Qty	Cat.No.(Standard slot Grey)	M.R.P.(₹) Per Unit	Std. Pkg.	Min Order Qty
	A 15 x 15	WWA1515HG	67	100	100	WWA1515HG2	134	64	64
	A 15 x 25	WWA1525HG	93	100	100	WWA1525HG2	186	64	64
	A 25 x 25	WWA2525SG	111	70	70	WWA2525SG2	222	48	48
	A 30 x 25	WWA3025SG	123	70	70	WWA3025SG2	246	48	48
	A 40 x 30	WWA4030SG	153	75	75	WWA4030SG2	306	32	32
	A 45 x 25	WWA4525SG	156	75	75	WWA4525SG2	312	40	40
	A 45 x 30	WWA4530SG	157	50	50	WWA4530SG2	314	32	32
	A 45 x 45	WWA4545SG	199	50	50	WWA4545SG2	398	18	18
	A 45 x 60	WWA4560SG	240	50	50	WWA4560SG2	480	12	12
	A 60 x 25	WWA6025SG	199	50	50	WWA6025SG2	398	18	18
	A 60 x 45	WWA6045SG	234	50	50	WWA6045SG2	468	18	18
	A 60 x 60	WWA6060SG	277	32	32	WWA6060SG2	554	12	12
	A 60 x 120	WWA60120SG	942	18	90	WWA60120SG2	1884	8	80
	A 75 x 45	WWA7545SG	290	40	40	WWA7545SG2	580	12	12
	A 75 x 75	WWA7575SG	409	32	32	WWA7575SG2	818	12	12
	A 80 x 80	WWA8080SG	457	25	25	WWA8080SG2	914	12	12
	A 100 x 100	WWA100100SG	739	18	18	WWA100100SG2	1478	8	40

cover for fast and efficient locking.

- * Snap fit cover
- * Easy to remove

Type B	Description	1 Meter				2 Meter			
	W x H	Cat. No. (Standard slot)	M.R.P.(₹) Per Unit	Std. Pkg.	Min Order Qty	Cat. No. (Standard slot)	M.R.P.(₹) Per Unit	Std. Pkg.	Min Order Qty
	B 25 x 25	WWB2525SG	119	100	100	WWB2525SG2	238	36	36
	B 25 x 30	WWB2530SG	128	100	100	WWB2530SG2	256	36	36
	B 25 x 40	WWB2540SG	156	75	75	WWB2540SG2	312	36	36
	B 25 x 45	WWB2545SG	162	75	225	WWB2545SG2	324	36	108
	B 25 x 60	WWB2560SG	205	50	50	WWB2560SG2	410	18	18
	B 25 x 80	WWB2580SG	278	50	50	WWB2580SG2	556	18	18
	B 25 x 100	WWB25100SG	353	25	25	WWB25100SG2	706	18	18
	B 30 x 20	WWB3020UG	156	100	200	WWB3020UG2	312	36	180
	B 30 x 80	WWB3080SG	385	50	200	WWB3080SG2	770	18	90
	B 40 x 40	WWB4040SG	205	50	50	WWB4040SG2	410	18	18
	B 45 x 45	WWB4545SG	212	50	50	WWB4545SG2	424	18	18
	B 40 x 60	WWB4060SG	248	50	50	WWB4060SG2	496	18	18
	B 40 x 80	WWB4080SG	294	50	50	WWB4080SG2	588	18	18
	B 40 x 100	WWB40100SG	369	25	25	WWB40100SG2	738	12	12
	B 45 x 20	WWB4520UG	163	75	225	WWB4520UG2	326	36	180
	B 50 x 100	WWB50100SG	424	30	90	WWB50100SG2	848	12	60
	B 60 x 20	WWB6020UG	222	50	200	WWB6020UG2	444	18	90
	B 60 x 40	WWB6040SG	248	50	50	WWB6040SG2	496	18	90
	B 60 x 60	WWB6060SG	294	50	50	WWB6060SG2	588	12	12
	B 60 x 80	WWB6080SG	382	40	40	WWB6080SG2	764	12	12
	B 60 x 100	WWB60100SG	503	30	30	WWB60100SG2	1006	8	8
	B 72 x 64	WWB7264SG	353	32	96	WWB7264SG2	706	18	90
	B 75 x 75	WWB7575SG	496	32	96	WWB7575SG2	992	8	40
	B 75 x 100	WWB75100SG	519	25	75	WWB75100SG2	1038	8	40
	B 80 x 40	WWB8040SG	300	50	100	WWB8040SG2	600	12	60
	B 80 x 60	WWB8060SG	397	40	80	WWB8060SG2	794	12	60
	B 80 x 80	WWB8080SG	494	32	32	WWB8080SG2	988	12	12
	B 80 x 100	WWB80100SG	555	24	24	WWB80100SG2	1110	8	8
	B 100 x 60	WWB10060SG	473	30	30	WWB10060SG2	946	8	8
	B 100 x 80	WWB10080SG	555	25	25	WWB10080SG2	1110	8	8
	B 100 x 100	WWB100100SG	809	18	18	WWB100100SG2	1618	8	8
	B 120 x 80	WWB12080SG	786	18	90	WWB12080SG2	1572	6	48
	B 150 x 100	WWB150100SG	1010	12	48	WWB150100SG2	2020	4	40
	B 150 x 150	WWB150150SG	2195	8	80	WWB150150SG2	4390	2	40


Non slip cover design of minimum encumbrance and maximum grip

- * Non - slip cover
- * Positive locking


Note : 1) For any special colour request additional 10% will be charged on price. For cut length additional 10% will be charged. 2) Thin / Unslot will be supplied on request. For thin slot replace the cat. number ending with SG by TG, For un slotted channel replace the cat. number ending with SG by UG. MRP will be same as standard slot.

Halogen Free Ducts (8538)

Type B



Non slip cover design of minimum encumbrance and maximum grip




B Type

- * Non - slip cover
- * Positive locking


Description	1 Meter				2 Meter			
W x H	Cat. No. (Thin slot)	M.R.P. (₹) Per Unit	Std. Pkg.	Min Order Qty	Cat. No. (Thin slot)	M.R.P. (₹) Per Unit	Std. Pkg.	Min Order Qty
B 25 x 30	WWB2530HG	399	100	100	WWB2530HG2	798	36	72
B 25 x 40	WWB2540HG	508	75	150	WWB2540HG2	1016	36	72
B 25 x 60	WWB2560HG	683	50	100	WWB2560HG2	1366	18	54
B 25 x 80	WWB2580HG	879	50	100	WWB2580HG2	1758	18	54
B 25 x 100	WWB25100HG	1078	25	100	WWB25100HG2	2156	18	54
B 40 x 40	WWB4040HG	598	50	100	WWB4040HG2	1196	18	54
B 40 x 60	WWB4060HG	795	50	100	WWB4060HG2	1590	18	54
B 40 x 80	WWB4080HG	964	50	100	WWB4080HG2	1928	18	54
B 40 x 100	WWB40100HG	1191	25	100	WWB40100HG2	2382	12	48
B 60 x 40	WWB6040HG	766	50	100	WWB6040HG2	1532	18	54
B 60 x 60	WWB6060HG	937	50	100	WWB6060HG2	1874	12	48
B 60 x 80	WWB6080HG	1303	40	120	WWB6080HG2	2606	12	48
B 60 x 100	WWB60100HG	1504	30	90	WWB60100HG2	3008	8	48
B 80 x 40	WWB8040HG	937	50	100	WWB8040HG2	1874	12	48
B 80 x 60	WWB8060HG	1248	40	120	WWB8060HG2	2496	12	48
B 80 x 80	WWB8080HG	1504	32	96	WWB8080HG2	3008	12	48
B 80 x 100	WWB80100HG	1644	24	96	WWB80100HG2	3288	8	48
B 100 x 60	WWB10060HG	1445	30	90	WWB10060HG2	2890	8	48
B 100 x 80	WWB10080HG	1815	25	100	WWB10080HG2	3630	8	48
B 100 x 100	WWB100100HG	2182	18	90	WWB100100HG2	4364	8	48

* Under development


Slotting Styles (A & B Types)




Unslotted (US)




Standard Slot



Thin Slot



Thin Slot with Restriction(R)



Standard Slot with Restriction(SR)

Covers for FRLS Cable Ducts

	Description	Cat. No.	M.R.P. (₹) Per Unit
	Cover for 15 mm A type	CCA15SG	31
	Cover for 25 mm A type	CCA25SG	48
	Cover for 30 mm A type	CCA30SG	59
	Cover for 45 mm A type	CCA45SG	92
	Cover for 60 mm A type	CCA60SG	110
	Cover for 75 mm A type	CCA75SG	139
	Cover for 80 mm A type	CCA80SG	165
	Cover for 100 mm A type	CCA100SG	202
	Cover for 25 mm B type	CCB25SG	50
	Cover for 30 mm B type	CCB30SG	61
	Cover for 40 mm B type	CCB40SG	76
	Cover for 45 mm B type	CCB45SG	94
	Cover for 50 mm B type	CCB50SG	113
	Cover for 60 mm B type	CCB60SG	113
	Cover for 72 mm B type	CCB72SG	143
	Cover for 75 mm B type	CCB75SG	143
	Cover for 80 mm B type	CCB80SG	171
	Cover for 100 mm B type	CCB100SG	208
	Cover for 120 mm B type	CCB120SG	222
	Cover for 150 mm B type	CCB150SG	260

Relays (8536)

- AC & DC relays from 3A to 100 Amps from 1 to 4 pole
- DC power relays upto 125 Amps
- Miniature, General purpose, Power & Automotive Relays
- Termination via Solder, PCB mounted, Plug-In and Screw type terminals
- Silver contacts for enhanced life, **ERDA Tested & complies with JSS standards**

M SERIES - MSP (Equivalent to MY)

MSP	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 Type MSP (AC/DC) with LED at 240V AC/24V DC Plug in Enclosed Version - 5 Amps Resistive 2 Pole/3 Pole/4 Pole	MSP2P12	2P	12V DC	20	244
	MSP2P24	2P	24V DC	20	244
	MSP2P48	2P	48V DC	20	277
	MSP2P110	2P	110V DC	20	255
	MSP2P12A	2P	12V AC	20	271
	MSP2P24A	2P	24V AC	20	266
	MSP2P110A	2P	110V AC	20	299
	MSP2P240A	2P	240V AC	20	283
	MSP3P12	3P	12V DC	20	255
	MSP3P24	3P	24V DC	20	255
	MSP3P110	3P	110V DC	20	271
	MSP3P24A	3P	24V AC	20	310
	MSP3P110A	3P	110V AC	20	316
	MSP3P240A	3P	240V AC	20	332
	MSP4P12	4P	12V DC	20	255
	MSP4P24	4P	24V DC	20	255
	MSP4P48	4P	48V DC	20	283
	MSP4P110	4P	110V DC	20	277
	MSP4P12A	4P	12V AC	20	327
	MSP4P24A	4P	24V AC	20	316
	MSP4P110A	4P	110V AC	20	316
	MSP4P240A	4P	240V AC	20	327

MSP - Test Button	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
Approvals   2 Pole - 12 Amps/4 Pole - 7 Amps @ 277 V AC/30 V DC with Flag & LED-UL Marked	MSP2P012D12TNE	2P	12V DC	20	306
	MSP2P024D12TNE	2P	24V DC	20	306
	MSP2P110D12TNE	2P	110V DC	20	317
	MSP2P012A12TNE	2P	12V AC	20	329
	MSP2P024A12TNE	2P	24V AC	20	329
	MSP2P110A12TNE	2P	110V AC	20	356
	MSP2P240A12TNE	2P	240V AC	20	345
	MSP4P012D07TNE	4P	12V DC	20	345
	MSP4P024D07TNE	4P	24V DC	20	345
	MSP4P110D07TNE	4P	110V DC	20	369
	MSP4P012A07TNE	4P	12V AC	20	419
	MSP4P024A07TNE	4P	24V AC	20	391
	MSP4P110A07TNE	4P	110V AC	20	414
	MSP4P240A07TNE	4P	240V AC	20	419

Relays (8536)

M SERIES - MKG



MKG (AC/DC) with
LED indication - 5 Amps
Resistive at 240V AC/24 DC
Plug in Enclosed Version

MKG -	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
	MKG2P06	2P	6V DC	10	332
	MKG2P12	2P	12V DC	10	293
	MKG2P18	2P	18V DC	10	349
	MKG2P24	2P	24V DC	10	298
	MKG2P30	2P	30V DC	10	394
	MKG2P48	2P	48V DC	10	321
	MKG2P110	2P	110V DC	10	354
	MKG2P220	2P	220V DC	10	405
	MKG3P12	3P	12V DC	10	371
	MKG3P18	3P	18V DC	10	377
	MKG3P24	3P	24V DC	10	377
	MKG3P30	3P	30V DC	10	461
	MKG3P48	3P	48V DC	10	444
	MKG3P110	3P	110V DC	10	433
	MKG3P220	3P	220V DC	10	579
	MKG2P06A	2P	06V AC	10	326
	MKG2P12A	2P	12V AC	10	304
	MKG2P24A	2P	24V AC	10	298
	MKG2P110A	2P	110V AC	10	298
	MKG2P240A	2P	240V AC	10	383
	MKG3P12A	3P	12V AC	10	366
	MKG3P24A	3P	24V AC	10	354
	MKG3P110A	3P	110V AC	10	366
	MKG3P240A	3P	240V AC	10	439

RELAYS

M SERIES - MKP



Type MKP (AC/DC) with
LED indication -10 Amps
Resistive at 240V AC/24V DC
Plug in Enclosed Version

MKP	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
	MKP2P06	2P	06V DC	10	338
	MKP2P12	2P	12V DC	10	332
	MKP2P24	2P	24V DC	10	338
	MKP2P48	2P	48V DC	10	371
	MKP2P110	2P	110V DC	10	371
	MKP2P220	2P	220V DC	10	501
	MKP3P12	3P	12V DC	10	411
	MKP3P24	3P	24V DC	10	411
	MKP3P48	3P	48V DC	10	461
	MKP3P110	3P	110V DC	10	484
	MKP3P220	3P	220V DC	10	664
	MKP2P06A	2P	06V AC	10	360
	MKP2P12A	2P	12V AC	10	354
	MKP2P24A	2P	24V AC	10	354
	MKP2P110A	2P	110V AC	10	366
	MKP2P240A	2P	240V AC	10	473
	MKP3P12A	3P	12V AC	10	467
	MKP3P24A	3P	24V AC	10	467
	MKP3P110A	3P	110V AC	10	456
	MKP3P240A	3P	240V AC	10	523

M SERIES - MKP

MKP - Test Button	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
Approvals   Type MKP (AC/DC) with LED indication -10 Amps Resistive at 277V AC/24 DC Plug in Enclosed Version with Test Button/Mechanical Indicator	MKP2P012D10TNE	2P	12V DC	10	437
	MKP2P024D10TNE	2P	24V DC	10	437
	MKP2P110D10TNE	2P	110V DC	10	477
	MKP3P012D10TNE	3P	12V DC	10	523
	MKP3P024D10TNE	3P	24V DC	10	523
	MKP3P110D10TNE	3P	110V DC	10	592
	MKP2P024A10TNE	2P	24V AC	10	460
	MKP2P110A10TNE	2P	110V AC	10	472
	MKP2P240A10TNE	2P	240V AC	10	587
	MKP3P024A10TNE	3P	24V AC	10	575
	MKP3P110A10TNE	3P	110V AC	10	569
	MKP3P240A10TNE	3P	240V AC	10	638

Sockets for MK / MSP Series (8538)

SOCKETS	Cat No.	Coil Volts	Min. Pack	M.R.P. (₹) Per Unit
	MK08C	8 Pin for 2 C/O & Closed Terminals for "MKG/MKP" Relays	20	76
	MK11C	11 Pin for 3 C/O & Closed Terminals for "MKG/MKP" Relays	20	110
	MSP08C	Closed Terminals Socket for MSP - 2 Pole	20	112
	MSP14C	Closed Terminals Socket for MSP - 4 Pole	20	147
	MSP14P	PCB Socket for MSP - 4 Pole	50	55

UL Sockets for MK / MSP Series available on request

M SERIES - MIC

MIC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 MIC (AC/DC) - 12 Amps Resistive at 240V AC/24V DC/ Enclosed solder/ PCB Version	MIC2P12	2P	12V DC	20	270
	MIC2P24	2P	24V DC	20	281
	MIC3P12	3P	12V DC	20	315
	MIC3P24	3P	24V DC	20	321

Relays

M SERIES - MSC

MSC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 MSC (AC/DC) - 5 Amps Resistive at 240V AC/24V DC Enclosed Solder Version	MSC1P12	1P	12V DC	10	169
	MSC1P18	1P	18V DC	10	180
	MSC1P24	1P	24V DC	10	174
	MSC2P06	2P	06V DC	10	259
	MSC2P12	2P	12V DC	10	236
	MSC2P18	2P	18V DC	10	253
	MSC2P24	2P	24V DC	10	248
	MSC2P48	2P	48V DC	10	298
	MSC3P06	3P	06V DC	10	332
	MSC3P12	3P	12V DC	10	293
	MSC3P18	3P	18V DC	10	304
	MSC3P24	3P	24V DC	10	293
	MSC3P48	3P	48V DC	10	399
	MSC3P110	3P	110V DC	10	377
	MSC2P240A	2P	240V AC	10	371
	MSC3P240A	3P	240V AC	10	411

RELAYS

H SERIES - HSC

HSC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 HSC (AC/DC) - 10 Amps Resistive at 240V AC/24V DC Enclosed Solder Version	HSC1P12	1P	12V DC	10	236
	HSC1P18	1P	18V DC	10	264
	HSC1P24	1P	24V DC	10	248
	HSC2P12	2P	12V DC	10	321
	HSC2P18	2P	18V DC	10	383
	HSC2P24	2P	24V DC	10	338
	HSC3P12	3P	12V DC	10	405
	HSC3P24	3P	24V DC	10	422
	HSC2P240A	2P	240V AC	10	512
	HSC3P240A	3P	240V AC	10	579

H SERIES - HSR

HSR	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 HSR (AC/DC) - 16 Amps Resistive at 240V AC/24V DC/ Enclosed Solder Version	HSR1P12	1P	12V DC	10	253
	HSR1P18	1P	18V DC	10	276
	HSR1P24	1P	24V DC	10	281
	HSR2P12	2P	12V DC	10	360
	HSR2P18	2P	18V DC	10	399
	HSR2P24	2P	24V DC	10	371
	HSR3P12	3P	12V DC	10	461
	HSR3P18	3P	18V DC	10	540
	HSR3P24	3P	24V DC	10	495
	HSR2P240A	2P	240V AC	10	641
	HSR3P240A	3P	240V AC	10	681

PRC SERIES - Power Relays


PRC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 PRC 30 (AC/DC) - 30 Amps Resistive at 240V AC/24V DC/ Enclosed	PRC301P12	1P	12V DC	4	422
	PRC301P24	1P	24V DC	4	428
	PRC302P12	2P	12V DC	4	568
	PRC302P24	2P	24V DC	4	574
	PRC303P12	3P	12V DC	4	754
	PRC303P24	3P	24V DC	4	759
	PRC301P240A	1P	240V AC	4	461
	PRC302P240A	2P	240V AC	4	608
	PRC303P240A	3P	240V AC	4	776

 PRC 40 (AC/DC) - 40 Amps Resistive at 240V AC/24V DC/ Enclosed	PRC401P12	1P	12V DC	4	428
	PRC401P24	1P	24V DC	4	433
	PRC401P48	1P	48V DC	4	596
	PRC401P240A	1P	240V AC	4	467

 PRC 60 (AC/DC) - 60 Amps Resistive at 240V AC/24V DC/ Enclosed PRC 80 (AC/DC)-80 Amps Resistive at 240V AC/24V DC/ Enclosed PRC 100 (AC/DC) - 100 Amps Resistive at 240V AC/24V DC/ Enclosed	PRC601P12	1P	12V DC	4	484
	PRC601P24	1P	24V DC	4	495
	PRC601P240A	1P	240V AC	4	591
	PRC801P12	1P	12V DC	3	575
	PRC801P24	1P	24V DC	3	591
	PRC801P240A	1P	240V AC	3	774
	PRC1001P12	1P	12V DC	3	790
	PRC1001P24	1P	24V DC	3	828
	PRC1001P240A	1P	240V AC	3	849

Relay Modules (8536)

1 & 2 Changeovers with 2,4,6 & 8 channels

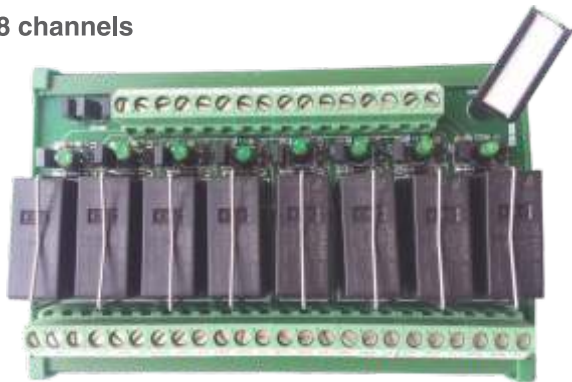

1 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	1 CO, 24VDC with OMRON Relay	2	RMS021P24	525
	1 CO, 24VDC with OMRON Relay	4	RMS041P24	955
	1 CO, 24VDC with OMRON Relay	8	RMS081P24	1300

1 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	1 CO, 110VAC with OMRON Relay	4	RMS041P110AC	1850
	1 CO, 110VAC with OMRON Relay	8	RMS081P110AC	3320
	1 CO, 230VAC with OMRON Relay	2	RMS021P230AC	1070
	1 CO, 230VAC with OMRON Relay	4	RMS041P230AC	2065
	1 CO, 230VAC with OMRON Relay	8	RMS081P230AC	4030

2 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	2 CO, 24VDC with OMRON Relay	2	RMS022P24	690
	2 CO, 24VDC with OMRON Relay	4	RMS042P24	1195
	2 CO, 24VDC with OMRON Relay	8	RMS082P24	2305

2 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	2 CO, 230VAC with OMRON Relay	2	RMS022P230AC	1220
	2 CO, 230VAC with OMRON Relay	4	RMS042P230AC	2265
	2 CO, 230VAC with OMRON Relay	8	RMS082P230AC	4515

* Other Coil Voltages offered on request

Terminal Connectors(8538)

salzer

- **Range from 2.5-95 Sq.mm Universal mounting**

Standard terminal connectors, Miniature, Double Level, Triple Level connectors & Screwless connectors

- **UL94 V0 grade material**

Fuse terminals, Earth Terminals, Stud Test & Disconnecting Terminals & Distribution Terminal Blocks

- **Accessories** : End plate / Clamp, Marking ferrules, Group markers, shorting links & Din rails

Standard Feed through Screw Clamp Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	SCRW2.5U	2.5	100	10.70
	SCRW2.5UE	4	100	12.20
	SCRW4U	4	100	13.00
	SCRW6U	6	100	17.60
	SCRW10U	10	100	22.10
	SCRW16U	16	50	41.90
	SCRW25U	25	50	66.00
	SCRW35U	35	50	94.50
	SCRW50U	50	20	277.60
	SCRW95U	95	10	401.10

Double Level Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	DBL4U	4	100	34.90
	DBLOFF4U	4	100	40.80
	DBL4U(I.S.)	4	100	46.40
	Accessories			
	EPDBL 4U	DBL4U / DBL4U(I.S.)	100	13.60
	SPDBL 4U - Spacer	DBL4U / DBL4U(I.S.)	100	13.60
	EPDBLOFF 4U	DBLOFF4U / 4UA - FRONT SIDE	100	19.30
	EPDBLOFF4UA	DBLOFF4U / 4UA - BACK SIDE	100	9.00

Triple Level Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	TL2.5U	2.5	100	90.60
	TL2.5UH	2.5	100	51.00
	Accessories			
	EPTL2.5U	TL2.5U/UL	100	20.40
	EPTL2.5UH	TL2.5UH	100	20.40

Multiple Connection Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	SCRW 4U 1-2	4	100	32.90
	SCRW 4U 2-2	4	100	45.30
	Accessories			
	EPSCRW4U 1-2	SCRW 4U 1-2	100	13.60
	EPSCRW4U 2-2	SCRW 4U 2-2	100	19.30

Micro Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	M4	4	100	11.80
	Accessories			
	P4	4	100	14.70
	EPP4	P4	100	6.80
Panel Mount Terminal 	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	EPM4	M4	100	9.00
	PPM4	M4	100	10.20

Fuse & Disconnect Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	F4U	4	100	47.00
	F4U(L)	4	100	72.50
	F6U	6	50	90.60
	FDBL4U	4	50	117.80
	FDBL4UE	4	50	134.90
	Accessories			
	EPF4U	F4U/F4U(L) / DISCTL4U	100	11.30
	PPF4U	F4U/F4U(L) / DISCTL4U	100	15.80
	EPFDBL4U	FDBL4U/4UE	100	19.30

Disconnect & Test Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	KN4U	4	50	61.20
	DISCT6U	6	50	79.90
	DISCT6US	6	25	218.70
	Accessories			
	EPKN4U	KN4U	100	12.40
	EPDISCT6U	DISCT6U / US	100	18.20

Stud Disconnect & Test Terminals for Current Transformer

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	STUDDISCT6U	6	25	78.20
	STUDDISCT6US	6	25	206.30
	Accessories			
	EPSTUDDISCT6U	STUDDISCT6U / STUDDISCT6US	100	18.20

Spring Clamp Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	CAGE2.5	2.5	100	14.50
	CAGE4	4	450	24.80
	CAGE6	6	50	48.20
	CAGE2.5 1-2	2.5	100	26.10
	CAGE4 1-2	4	50	40.80
	CAGE6 1-2	6	50	78.20
	CAGE2.5 2-2	2.5	100	34.00
	CAGE4 2-2	4	50	52.10
	CAGE6 2-2	6	50	62.40
	CAGEP2.5	2.5	100	13.60
	CAGEP2.5 2-2	2.5	100	25.00
	CAGEG2.5	2.5	100	77.00
	CAGEG4	4	50	91.70
	CAGEG6	6	50	119.00

Terminal Connectors

Stud Type Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	STUD B4	10	100	41.90
	STUD B5	16	100	52.10
	STUD N4	10	100	44.20
	STUD N5	16	100	54.30
	STUD N6	35	100	74.80
	Accessories For Stud Type Terminals			
	EPSTUD	STUD B4,B5.,N4,N5,N6	100	12.40
	PPSTUD	STUD B4,B5., N4,N5,N6	100	20.40

Grounding Terminals

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	G4	4	50	85.00
	GM4	4	100	53.20
	G6	6	50	98.60
	G10	10	20	112.20
	G16	16	50	141.70
	G35	35	20	280.90

Accessories - End Plates (8538)

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	EPSCRW2.5U/4U	SCRW2.5U/4U	100	7.90
	EPSCRW6U/10U	SCRW6U/10U	100	7.90
	EPSCRW25U	SCRW25U	100	11.30
	EPSCRW35U	SCRW35U	100	13.60
	EPCAGE2.5	CAGE2.5	100	10.20
	EPCAGE4	CAGE4	100	12.40
	EPCAGE6	CAGE6	100	18.20
	EPCAGE2.5 1-2	CAGE2.5 1-2	100	11.30
	EPCAGE4 1-2	CAGE4 1-2	100	13.60
	EPCAGE6 1-2	CAGE6 1-2	100	22.70
	EPCAGE2.5 2-2	CAGE2.5 2-2	100	13.60
	EPCAGE4 2-2	CAGE4 2-2	100	19.30
	EPCAGEP2.5	CAGEP2.5 (set of Left & Right)	100	12.40

Partition Plates

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	PPSCRW2.5U/4U	SCRW2.5U/4U	100	13.60
	PPSCRW6U/10U	SCRW6U/10U	100	18.20
	PPSCRW25U	SCRW25U	100	19.30
	PPSCRW35U	SCRW35U	100	22.70
	PPCAGE2.5	CAGE2.5	100	12.40
	PPCAGE4	CAGE4	100	15.80
	PPCAGE6	CAGE6	100	20.40
	PPCAGE2.5 1-2	CAGE2.5 1-2	100	15.80
	PPCAGE2.5 2-2	CAGE2.5 2-2	100	19.30
	PPCAGE4 1-2	CAGE4 1-2	100	19.30
	PPCAGE4 2-2	CAGE4 2-2	100	23.80
	PPCAGE6 1-2	CAGE6 1-2	100	23.80
	PPCAGE6 2-2	CAGE6 2-2	100	38.50


Terminal Connectors salzer

Separator Plate

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	SPSCRW2.5U/4U	SCRW2.5/4U	100	6.80
	SPSCRW6U/10U	SCRW6/10U	100	6.80
	SPSCRW16U	SCRW16U / SCRW16UCR	100	6.80
	SPDBL4U	DBL4U	100	6.80
	SPP4	P4	100	6.80

Accessories

Marking Labels

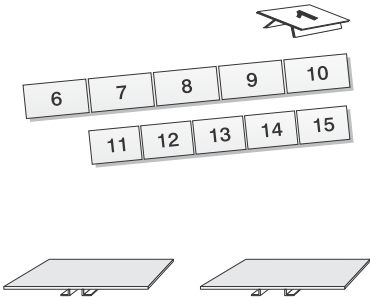	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	KM/2	DBL4U/4U(I.S) / P4 / F4U / FDBL4U / TL2.5U/UL/UH/UHL / M4/4S/4SU / DISCTL4U/DBLDISCTL4U/ GM4 / DBL4U(E) SERIES	100	3.80
	KM/3	CAGEP2.5 2-2	100	3.80
	KM/4	CAGEP2.5	100	3.80
	KM/5	SCRW2.5U / GN4 / TH2.5U K/J/T / CAGE2.5/2.5 1-2/2-2	100	3.80
	KM/6	SCRW4U/4U1-2/4U2-2 / DBL4U / DBLOFF4U/4UA / G4 / KN4U / GN16/35 / CAGE4/4 1-2/2-2 / DISBL4/1-5 / 4/2(1)-44(1)	100	3.80
	KM/8	SCRW6U / F4U / DISBL6/2-4 / FDBL4U / 4U(E)/4ULR/4U(E)LR / DISCT6U/L6U / CAGE6/6 1-2	100	3.80
	KM/10	SCRW10U / G10 / DISBL10/2-4	100	3.80
	KM/12	SCRW16U/25U	100	3.80
	KM/15	SCRW35U / G35	100	3.80
	KM/50	SCRW50U	100	3.80
	KM/95	SCRW95U	100	3.80
	KM/G1,G2	ES1N OR M4/DBL4U/SCRW50U/95U	100	3.80

End Clamp / End Stopper

	Cat No.	Suitable for Wire Size (mm ²)	Std Pack Nos	M.R.P. (₹) Per Unit
	ES1S	DIN 35 RAIL	100	14.70
	ES2S	DIN 35-15 RAIL	100	14.70
	ES3S	DIN 32 RAIL	100	11.30
	ES1N	DIN 15 RAIL	100	9.00
	ES2N	DIN 35 / DIN 35-15 / DIN 32 RAIL	100	13.60
	ES3N	DIN 35 RAIL / DIN 35-15 RAIL	100	11.20
	MTGBKT18	STEEL	100	25.00
	SPACER8			11.30
	MTGBASE18	DIN 35/35-15	100	21.60

Din Rails / Channels

	Cat No.	Std Pack Nos	M.R.P. (₹) Per Unit
	DIN35/7.5MM - 1M (suitable for All Terminals) Unslot	50	154.00
	DIN35/7.5MM - 1M - S (suitable for All Terminals) Slot	50	161.00

Note: For Shorting links and other accessories please contact Factory

Prices given here for **Grey Color**, for other colors 10% extra will be charged
(Other Color possible are Red / Yellow / Blue / Black / Green / White / Brown
with MOQ of 200 Nos per color)

Limit Switches (8536)

- **Limit switches** : Available in Normal / Snap action
- Precision limit switches: 1NO + 1NC / 2NO +2NC
- Operating force: From Light to Heavy duty applications
- Versatile mounting heads, Rugged aluminum die cast housing



SL201

SL202

SL200 Series

Cat No.	Description	Contact Details		MRP (₹) Per Unit
SL201	Ball Actuator	Snap Action	1NO+1NC	935
SL202	Roller Actuator	Snap Action	1NO+1NC	1051
SL203	Roller Lever Actuator	Snap Action	1NO+1NC	1051
SL207/1	Angular Roller Lever Actuator RS	Snap Action	1NO+1NC	1051

Note: SL 207/1 - Angular Roller Lever Actuator Right Side

SL 600Series



SL600/600P/600N



SL603

SL609

Cat No.	Description	Contact Details		MRP (₹) Per Unit
SL600	Only Push Rod Operated without Housing (without protection cover)	Snap Action	1NO+1NC	314
SL600P	Only Push Rod Operated without Housing (with protection cover)	Snap Action	1NO+1NC	363
SL600PDLBP	Push Rod Operated without Housing (with protection cover) - Bulk Pack	Snap Action	1NO+1NC	303
SL600N	Push Rod Operated Without Housing	Normal Action	1NO+1NC	264
SL600NP	Push Rod Operated Without Housing (with protection cover)	Normal Action	1NO+1NC	303
SL600NPDLBP	Push Rod Operated Without Housing (with protection cover) - Bulk Pack	Normal Action	1NO+1NC	297
SL603	Aluminum Housing with Normal Roller Lever Actuator with IP65	Snap Action	1NO+1NC	875
SL605	Aluminum Housing with 38mm Rotating Roller Lever Assembly	Snap Action	1NO+1NC	1645
SL609	Aluminum Housing with Short Lever Roller Actuator with IP43	Snap Action	1NO+1NC	869



SL709



SL705

SL 700 Series

Cat No.	Description	Contact Details		MRP (₹) Per Unit
SL702	Top Push Roller Spring Return	Snap Action	1NO+1NC	1645
SL705	38mm Long, Rotating Roller Lever Spring Return	Snap Action	1NO+1NC	1782
SL7061	Nylon Catwhisker Spring Return	Snap Action	1NO+1NC	1551
SL708	76mm long Rotating Roller Lever Spring Return	Snap Action	1NO+1NC	1782
SL709	Rotating Adjustable Roller Lever (32mm-82.5mm) Spring Return	Snap Action	1NO+1NC	1782

LIMIT SWITCHES



SL1500-1A



SL1503-1AR

SL 1500 Series

Cat No.	Description	Contact Details		MRP (₹) Per Unit
SL15001A	Only Contact Block Without Operator	Snap Action	1NO+1NC	616
SL15022AH	Top Push Roller Operator Horizontal IP 65 from the Top	Snap Action	2NO+2NC	1062
SL15031AR	Roller Lever Operator Right Hand Mounting	Snap Action	1NO+1NC	803
SL15032AR		Snap Action	2NO+2NC	1034

Note: 1A - 1NO+1NC : 2AH - 2NO+2NC Horizontal operations
1AR - 1NO+1NC, Right Hand Mounting
2AR - 2NO+2NC, Right Hand Mounting

Plug & Socket (8536)

- 16 Amps - 125 Amps with IP44 & IP67
- 200 Amps - 400 Amps with IP67
- Combination Socket Box & Mobile Combination Socket
- SCHUKO Plug & Sockets
- Socket with switch & Mechanical Interlock
- 20V- 50V Low voltage plug & socket

Protection Type	Rating AMP	No of Poles	230V 50 & 60 Hz	400V 50 & 60 Hz	MRP (₹) Per Unit
			Part Number	Part Number	



Connectors

IP 44	16	2+E	IP01634-510		711
IP 44	16	3+E		IP01644-514	828
IP 44	16	3+N+E		IP01654-5	838
IP 44	32	2+E	IP03234-522		1020
IP 44	32	3+E		IP03244-526	1194
IP 44	32	3+N+E		IP03254-6	1274
IP 44	63	2+E	IP06334-1237		4824
IP 44	63	3+E		IP06344-1241	5166
IP 44	63	3+N+E		IP06354-1245	5455



Plugs

IP 44	16	2+E	IP01634-248		494
IP 44	16	3+E		IP01644-252	639
IP 44	16	3+N+E		IP01654-3	656
IP 44	32	2+E	IP03234-260		788
IP 44	32	3+E		IP03244-264	916
IP 44	32	3+N+E		IP03254-4	1024
IP 44	63	2+E	IP06334-1227		3326
IP 44	63	3+E		IP06344-1231	4366
IP 44	63	3+N+E		IP06354-1235	4620



Panel Mounted Socket, Straight

IP 44	16	2+E	IP01634-1366		602
IP 44	16	3+E		IP01644-1390	873
IP 44	16	3+N+E		IP01654-1385	881
IP 44	32	2+E	IP03234-1395		967
IP 44	32	3+E		IP03244-1399	1115
IP 44	32	3+N+E		IP03254-3451	1163
IP 44	63	2+E	IP06334-1261		3563
IP 44	63	3+E		IP06344-1248	3966
IP 44	63	3+N+E		IP06354-1252	4583



Panel Mounted Socket, Angled

IP 44	16	2+E	IP01634-1463		602
IP 44	16	3+E		IP01644-1467	873
IP 44	16	3+N+E		IP01654-1473	881
IP 44	32	2+E	IP03234-1492		967
IP 44	32	3+E		IP03244-1496	1115
IP 44	32	3+N+E		IP03254-1500	1163
IP 44	63	2+E	IP06334-1147		3563
IP 44	63	3+E		IP06344-1151	3966
IP 44	63	3+N+E		IP06354-1155	4583



Wall Mounted Socket

IP 44	16	2+E	IP01634-101		1173
IP 44	16	3+E		IP01644-105	1449
IP 44	16	3+N+E		IP01654-111	1631
IP 44	32	2+E	IP03234-1421		2038
IP 44	32	3+E		IP03244-1425	2206
IP 44	32	3+N+E		IP03254-1557	2413
IP 44	63	2+E	IP06334-1137		4751
IP 44	63	3+E		IP06344-1141	5160
IP 44	63	3+N+E		IP06354-1145	5774

	Protection Type	Rating AMP	No of Poles	230V 50 & 60 Hz	400V 50 & 60 Hz	MRP (₹) Per Unit
				Part Number	Part Number	

	Panel Mounted Inlets	IP 44	16	2+E	IP01634-812	685
		IP 44	16	3+E	IP01644-813	784
		IP 44	16	3+N+E	IP01654-815	873
		IP 44	32	2+E	IP03234-817	977
		IP 44	32	3+E	IP03244-819	1109
		IP 44	32	3+N+E	IP03254-821	1283
		IP 44	63	2+E	IP06334-1981	3297
		IP 44	63	3+E	IP06344-1982	3872
		IP 44	63	3+N+E	IP06354-1688	4446

	Wall Mounted Inlets	IP 44	16	2+E	IP01634-332	1306
		IP 44	16	3+E	IP01644-336	1609
		IP 44	16	3+N+E	IP01654-342	1813
		IP 44	32	2+E	IP03234-344	2267
		IP 44	32	3+E	IP03244-348	2457
		IP 44	32	3+N+E	IP03254-354	2679
		IP 44	63	2+E	IP06334-606	5280
		IP 44	63	3+E	IP06344-3607	5730
		IP 44	63	3+N+E	IP06354-3608	6417

	Wall Mounted Socket, Switched with Interlock	IP 44	16	2+E	IP01634-7002	6547
		IP 44	16	3+E	IP01644-5100	8730
		IP 44	16	3+N+E	IP01654-5103	10185
		IP 44	32	2+E	IP03234-5696	10548
		IP 44	32	3+E	IP03244-5105	10912
		IP 44	32	3+N+E	IP03254-5108	12003
		IP 44	63	2+E	IP06334-6571	16386
		IP 44	63	3+E	IP06344-5956	16997
		IP 44	63	3+N+E	IP06354-5959	21822

	Wall Mounted Socket, Switched with Interlock	IP 44	16	2+E	IP01634-7274	5501
		IP 44	16	3+E	IP01644-7275	5820
		IP 44	16	3+N+E	IP01654-7276	6911

Plug & Socket (8536)

		Protection Type	Rating AMP	No of Poles	230V 50 & 60 Hz	400V 50 & 60 Hz	MRP (₹) Per Unit
					Part Number	Part Number	
	Connectors	IP 67	16	2+E	IP01636-540		1601
		IP 67	16	3+E		IP01646-544	1876
		IP 67	16	3+N+E		IP01656-550	1876
		IP 67	32	2+E	IP03236-552		2184
		IP 67	32	3+E		IP03246-556	2311
		IP 67	32	3+N+E		IP03256-562	2311
		IP 67	63	2+E	IP06336-1574		5238
		IP 67	63	3+E		IP06346-1117	5272
		IP 67	63	3+N+E		IP06356-1121	6293
		IP 67	125	2+E	IP12536-3390		14548
		IP 67	125	3+E		IP12546-1450	14912
		IP 67	125	3+N+E		IP12556-1454	16366
	Plugs	IP 67	16	2+E	IP01636-278		619
		IP 67	16	3+E		IP01646-282	1456
		IP 67	16	3+N+E		IP01656-288	1491
		IP 67	32	2+E	IP03236-290		1747
		IP 67	32	3+E		IP03246-294	1819
		IP 67	32	3+N+E		IP03256-300	1819
		IP 67	63	2+E	IP06336-1571		4602
		IP 67	63	3+E		IP06346-1110	5181
		IP 67	63	3+N+E		IP06356-1114	5455
		IP 67	125	2+E	IP12536-3400		10912
		IP 67	125	3+E		IP12546-1443	14186
		IP 67	125	3+N+E		IP12556-1447	14548
	Panel Mounted Socket, Straight	IP 67	16	2+E	IP01636-218		1274
		IP 67	16	3+E		IP01646-222	1384
		IP 67	16	3+N+E		IP01656-228	1456
		IP 67	32	2+E	IP03236-230		1601
		IP 67	32	3+E		IP03246-234	1783
		IP 67	32	3+N+E		IP03256-240	1783
		IP 67	63	2+E	IP06336-1264		4366
		IP 67	63	3+E		IP06346-1124	5051
		IP 67	63	3+N+E		IP06356-1128	5093
		IP 67	125	2+E	IP12536-3380		10912
		IP 67	125	3+E		IP12546-1457	16003
		IP 67	125	3+N+E		IP12556-1461	16366
	Panel Mounted Socket, Angled	IP 67	16	2+E	IP01636-1475		1274
		IP 67	16	3+E		IP06356-1479	1384
		IP 67	16	3+N+E		IP01656-1485	1456
		IP 67	32	2+E	IP03236-1502		1601
		IP 67	32	3+E		IP03246-1506	1783
		IP 67	32	3+N+E		IP03256-1551	1783
		IP 67	63	2+E	IP06336-2180		4366
		IP 67	63	3+E		IP06346-205	5051
		IP 67	63	3+N+E		IP06356-209	5093
		IP 67	125	2+E	IP12536-3575		10912
		IP 67	125	3+E		IP12546-212	16003
		IP 67	125	3+N+E		IP12556-216	16366

				Protection Type	Rating AMP	No of Poles	230V 50 & 60 Hz	400V 50 & 60 Hz	MRP (₹) Per Unit
							Part Number	Part Number	
	Wall Mounted Socket	IP 67	16	2+E	IP01636-1192			1803	
		IP 67	16	3+E		IP01646-1196	2074		
		IP 67	16	3+N+E		IP01656-1200	2111		
		IP 67	32	2+E	IP03236-1202		2329		
		IP 67	32	3+E		IP03246-1206	2545		
		IP 67	32	3+N+E		IP03256-1210	2545		
		IP 67	63	2+E	IP06336-128		5201		
		IP 67	63	3+E		IP06346-132	5601		
		IP 67	63	3+N+E		IP06356-136	6533		
		IP 67	125	2+E	IP12536-1381		14366		
		IP 67	125	3+E		IP12546-139	16003		
		IP 67	125	3+N+E		IP12556-143	17822		
	Panel Mounted Inlets	IP 67	16	2+E	IP01636-826		873		
		IP 67	16	3+E		IP01646-827	1003		
		IP 67	16	3+N+E		IP01656-829	1117		
		IP 67	32	2+E	IP03236-831		1274		
		IP 67	32	3+E		IP03246-832	1419		
		IP 67	32	3+N+E		IP03256-834	1637		
		IP 67	63	2+E	IP06336-836		3621		
		IP 67	63	3+E		IP06346-3656	4203		
		IP 67	63	3+N+E		IP06356-3658	4785		
		IP 67	125	2+E	IP12536-3665		7894		
		IP 67	125	3+E		IP12546-3583	9420		
		IP 67	125	3+N+E		IP12556-1983	10930		
	Wall Mounted Inlets	IP 67	16	2+E	IP01636-1003		1783		
		IP 67	16	3+E		IP01646-1004	1912		
		IP 67	16	3+N+E		IP01656-1005	2184		
		IP 67	32	2+E	IP03236-1006		2583		
		IP 67	32	3+E		IP03246-1007	2764		
		IP 67	32	3+N+E		IP03256-1008	3038		
		IP 67	63	2+E	IP06336-1107		5784		
		IP 67	63	3+E		IP06346-357	6239		
		IP 67	63	3+N+E		IP06356-361	7274		
	Wall Mounted Socket, Switched with Interlock	IP 67	16	2+E	IP01636-7012		9456		
		IP 67	16	3+E		IP01646-5600	9820		
		IP 67	16	3+N+E		IP01656-5603	12366		
		IP 67	32	2+E	IP03236-5793		12366		
		IP 67	32	3+E		IP03246-5605	13457		
		IP 67	32	3+N+E		IP03256-5608	16003		
		IP 67	63	2+E	IP06336-5911		18183		
		IP 67	63	3+E		IP06346-5110	20913		
		IP 67	63	3+N+E		IP06356-5113	27276		

Plug & Socket (8536)


				Protection Type	Rating AMP	No of Poles	230V 50 & 60 Hz	400V 50 & 60 Hz	MRP (₹) Per Unit
							Part Number	Part Number	
	Wall Mounted Socket, Switched with Interlock	IP 67	16	2+E	IP01636-7278				8367
		IP 67	16	3+E			IP01646-7279		8730
		IP 67	16	3+N+E			IP01656-7280		10548
	Schuko Plug	IP 54	16	2+E	IP01635-10838				438
	Schuko Connector	IP 54	16	2+E	IP01635-10843				570
	Schuko Panel Mounted Socket	IP 54	16	2+E	IP01635-11031				474

- MCB's are offered in various current ratings from 0.5A to 63 Amps
- Single pole, Single pole with Neutral, Double & Triple pole, Triple pole with Neutral & Four pole, with **10KA Short Circuit rating in B & C Curve** with **CE** Mark.
- **Isolators** offered from 32A to 63Amps in Double pole, Triple pole & Four pole

IS/IEC 60898-1



CM/L - 6500091714

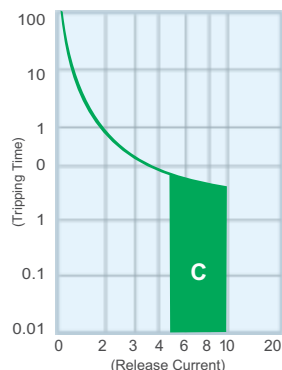

Miniature Circuit Breakers are intended to provide protection against overloads and short circuits, which can cause damage to cables & equipment. MCB's are offered in various current ratings & configurations as below. When current in a circuit exceeds the rating of the MCB the Thermal Bi-Metallic element gets heated & initiates the tripping action. Higher the overload faster the MCB trips.

Magnetic element initiates a rapid tripping action in less than $1/10^{\text{th}}$ of a second on sensing higher fault currents. Typically C type MCB's trips above 5 to 10 times the rated current and are mainly used where loads are Inductive & Resistive. MCB's can withstand & clear fault currents upto 10KA.

Single Pole MCB C Curve

Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
1	1A Single Pole MCB	1/12/144	MXSPC001	430
2	2A Single Pole MCB	1/12/144	MXSPC002	430
3	3A Single Pole MCB	1/12/144	MXSPC003	430
4	4A Single Pole MCB	1/12/144	MXSPC004	430
6	6A Single Pole MCB	1/12/144	MXSPC006	265
10	10A Single Pole MCB	1/12/144	MXSPC100	265
16	16A Single Pole MCB	1/12/144	MXSPC160	265
20	20A Single Pole MCB	1/12/144	MXSPC200	265
25	25A Single Pole MCB	1/12/144	MXSPC250	265
32	32A Single Pole MCB	1/12/144	MXSPC320	265
40	40A Single Pole MCB	1/12/144	MXSPC400	535
63	63A Single Pole MCB	1/12/144	MXSPC630	535



Double Pole MCB C Curve

Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
1	1A Double Pole MCB	1/6/72	MXDPC001	1100
2	2A Double Pole MCB	1/6/72	MXDPC002	1100
3	3A Double Pole MCB	1/6/72	MXDPC003	1100
4	4A Double Pole MCB	1/6/72	MXDPC004	1100
6	6A Double Pole MCB	1/6/72	MXDPC006	790
10	10A Double Pole MCB	1/6/72	MXDPC100	790
16	16A Double Pole MCB	1/6/72	MXDPC160	790
20	20A Double Pole MCB	1/6/72	MXDPC200	790
25	25A Double Pole MCB	1/6/72	MXDPC250	790
32	32A Double Pole MCB	1/6/72	MXDPC320	790
40	40A Double Pole MCB	1/6/72	MXDPC400	1140
63	63A Double Pole MCB	1/6/72	MXDPC630	1275



Triple Pole MCB C Curve



Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
1	1A Triple Pole MCB	1/4/48	MXTPC001	1640
2	2A Triple Pole MCB	1/4/48	MXTPC002	1640
3	3A Triple Pole MCB	1/4/48	MXTPC003	1640
4	4A Triple Pole MCB	1/4/48	MXTPC004	1640
6	6A Triple Pole MCB	1/4/48	MXTPC006	1270
10	10A Triple Pole MCB	1/4/48	MXTPC100	1270
16	16A Triple Pole MCB	1/4/48	MXTPC160	1270
20	20A Triple Pole MCB	1/4/48	MXTPC200	1270
25	25A Triple Pole MCB	1/4/48	MXTPC250	1270
32	32A Triple Pole MCB	1/4/48	MXTPC320	1270
40	40A Triple Pole MCB	1/4/48	MXTPC400	1880
63	63A Triple Pole MCB	1/4/48	MXTPC630	2015

Four Pole MCB C Curve



Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
1	1A Four Pole MCB	1/3/36	MXFPC001	2085
2	2A Four Pole MCB	1/3/36	MXFPC002	2085
3	3A Four Pole MCB	1/3/36	MXFPC003	2085
4	4A Four Pole MCB	1/3/36	MXFPC004	2085
6	6A Four Pole MCB	1/3/36	MXFPC006	1760
10	10A Four Pole MCB	1/3/36	MXFPC100	1760
16	16A Four Pole MCB	1/3/36	MXFPC160	1760
20	20A Four Pole MCB	1/3/36	MXFPC200	1760
25	25A Four Pole MCB	1/3/36	MXFPC250	1760
32	32A Four Pole MCB	1/3/36	MXFPC320	1760
40	40A Four Pole MCB	1/3/36	MXFPC400	2440
63	63A Four Pole MCB	1/3/36	MXFPC630	2610



Motor Load &
Industrial Applications



Domestic &
Commercial Applications

MCB - UL

Branch Protector

- 10 KA Short Circuit Rating
- High performance
- Easy installation
- B,C,D Curve

Supplementary Protector

- Flame retardant and non-toxic
- Visible Markings
- Line / Load wiring can be reversible
- Compact
- Added Safety
- Captive Screws

1 Pole

Rating	STD Pack	MRP(₹)Per Unit	
		UL 1077	UL 489
0.5A	10	689	911
1A	10	689	911
1.6A	10	689	911
2A	10	689	911
3A	10	689	911
4A	10	689	911
5A	10	689	911
6A	10	616	815
7A	10	616	815
8A	10	616	815
10A	10	616	815
13A	10	616	815
15A	10	616	815
16A	10	616	815
20A	10	616	815
25A	10	616	815
30A	10	616	815
32A	10	616	815
40A	10	647	856
50A	10	647	856
63A	10	647	856

1+N Pole

Rating	STD Pack	MRP(₹)Per Unit	
		UL 1077	UL 489
0.5A	6	1340	1769
1A	6	1340	1769
1.6A	6	1340	1769
2A	6	1340	1769
3A	6	1340	1769
4A	6	1340	1769
5A	6	1340	1769
6A	6	1193	1581
7A	6	1193	1581
8A	6	1193	1581
10A	6	1193	1581
13A	6	1193	1581
15A	6	1193	1581
16A	6	1193	1581
20A	6	1193	1581
25A	6	1193	1581
30A	6	1193	1581
32A	6	1193	1581
40A	6	1251	1659
50A	6	1251	1659
63A	6	1251	1659



* Same Price B,C,D Curve

2 Pole



Rating	STD Pack	MRP(₹)Per Unit	
		UL 1077	UL 489
0.5A	6	1379	1820
1A	6	1379	1820
1.6A	6	1379	1820
2A	6	1379	1820
3A	6	1379	1820
4A	6	1379	1820
5A	6	1379	1820
6A	6	1234	1631
7A	6	1234	1631
8A	6	1234	1631
10A	6	1234	1631
13A	6	1234	1631
15A	6	1234	1631
16A	6	1234	1631
20A	6	1234	1631
25A	6	1234	1631
30A	6	1234	1631
32A	6	1234	1631
40A	6	1294	1710
50A	6	1294	1710
63A	6	1294	1710



MCB - UL

3 Pole



Rating	STD Pack	MRP(₹)Per Unit	
		UL 1077	UL 489
0.5A	4	2069	2728
1A	4	2069	2728
1.6A	4	2069	2728
2A	4	2069	2728
3A	4	2069	2728
4A	4	2069	2728
5A	4	2069	2728
6A	4	1849	2450
7A	4	1849	2450
8A	4	1849	2450
10A	4	1849	2450
13A	4	1849	2450
15A	4	1849	2450
16A	4	1849	2450
20A	4	1849	2450
25A	4	1849	2450
30A	4	1849	2450
32A	4	1849	2450
40A	4	1941	2565
50A	4	1941	2565
63A	4	1941	2565

3+N Pole

Rating	STD Pack	MRP(₹)Per Unit	
		UL 1077	UL 489
0.5A	3	2716	3588
1A	3	2716	3588
1.6A	3	2716	3588
2A	3	2716	3588
3A	3	2716	3588
4A	3	2716	3588
5A	3	2716	3588
6A	3	2425	3212
7A	3	2425	3212
8A	3	2425	3212
10A	3	2425	3212
13A	3	2425	3212
15A	3	2425	3212
16A	3	2425	3212
20A	3	2425	3212
25A	3	2425	3212
30A	3	2425	3212
32A	3	2425	3212
40A	3	2544	3370
50A	3	2544	3370
63A	3	2544	3370

Note : Accessories available on request, Contact Head Office



- Range : 25A to 63A
- Precise sensitive range 30mA to 300mA
- 2 Pole and 4 Pole Available
- Suitable for Isolation
- Protection Degree - IP 20

RCCB

Two Pole RCCB



Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
30mA	RCCB 25A Double Pole	72	RXD030250	2930
30mA	RCCB 40A Double Pole	72	RXD030400	3050
30mA	RCCB 63A Double Pole	72	RXD030630	3225
100mA	RCCB 25A Double Pole	72	RXD100250	2930
100mA	RCCB 40A Double Pole	72	RXD100400	3050
100mA	RCCB 63A Double Pole	72	RXD100630	3225
300mA	RCCB 25A Double Pole	72	RXD300250	2930
300mA	RCCB 40A Double Pole	72	RXD300400	3050
300mA	RCCB 63A Double Pole	72	RXD300630	3225

Four Pole RCCB



Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
30mA	RCCB 25A Four Pole	36	RXF030250	3110
30mA	RCCB 40A Four Pole	36	RXF030400	3285
30mA	RCCB 63A Four Pole	36	RXF030630	3520
100mA	RCCB 25A Four Pole	36	RXF100250	3110
100mA	RCCB 40A Four Pole	36	RXF100400	3285
100mA	RCCB 63A Four Pole	36	RXF100630	3520
300mA	RCCB 25A Four Pole	36	RXF300250	3110
300mA	RCCB 40A Four Pole	36	RXF300400	3285
300mA	RCCB 63A Four Pole	36	RXF300630	3520

DC MCB IEC 60947-2

- DC MCB : 6KA as per IEC 60947-2
- 1 Pole 250V DC, 2 Pole 500V DC & 4 Pole 1000V DC
- (1 Double Pole DC (500 V) MCB) + (1 Double Pole AC MCB) in a Combo Pack
- Provides complete protection for DC and AC sides of solar rooftop installations

1 Pole

Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
6	6A, Single Pole, DC MCB -C	1/10/120	MXSPDC006	475
10	10A, Single Pole, DC MCB -C	1/10/120	MXSPDC100	475
16	16A, Single Pole, DC MCB -C	1/10/120	MXSPDC160	475
20	20A, Single Pole, DC MCB -C	1/10/120	MXSPDC200	475
25	25A, Single Pole, DC MCB -C	1/10/120	MXSPDC250	475
32	32A, Single Pole, DC MCB -C	1/10/120	MXSPDC320	475
40	40A, Single Pole, DC MCB -C	1/10/120	MXSPDC400	495
63	63A, Single Pole, DC MCB -C	1/10/120	MXSPDC630	530

2 Pole

Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
6	6A , Double Pole , DC MCB -C	1/6/72	MXDPDC006	965
10	10A , Double Pole , DC MCB -C	1/6/72	MXDPDC100	965
16	16A , Double Pole , DC MCB -C	1/6/72	MXDPDC160	965
20	20A , Double Pole , DC MCB -C	1/6/72	MXDPDC200	965
25	25A , Double Pole , DC MCB -C	1/6/72	MXDPDC250	965
32	32A , Double Pole , DC MCB -C	1/6/72	MXDPDC320	965
40	40A , Double Pole , DC MCB -C	1/6/72	MXDPDC400	1375
50	50A , Double Pole , DC MCB -C	1/6/72	MXDPDC500	1375
63	63A , Double Pole , DC MCB -C	1/6/72	MXDPDC630	1375

4 Pole

Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
6	6A , Four Pole, DC MCB -C	1/3/36	MXFPDC006	1970
10	10A , Four Pole , DC MCB -C	1/3/36	MXFPDC100	1970
16	16A , Four Pole , DC MCB -C	1/3/36	MXFPDC160	1970
20	20A , Four Pole , DC MCB -C	1/3/36	MXFPDC200	1970
25	25A , Four Pole , DC MCB -C	1/3/36	MXFPDC250	1970
32	32A , Four Pole , DC MCB -C	1/3/36	MXFPDC320	1970
40	40A , Four Pole , DC MCB -C	1/3/36	MXFPDC400	2310
50	50A , Four Pole , DC MCB -C	1/3/36	MXFPDC500	2310
63	63A , Four Pole , DC MCB -C	1/3/36	MXFPDC630	2420

Combo Pack



Solar Combo

Rating	Description	STD.Pack	Cat No	MRP (₹) Per Unit
16+16	1 AC 16A DP MCB +1 DC 16A DP MCB	1/1/36	MXSCDP1616	1450
25+16	1 AC 25A DP MCB +1 DC 16A DP MCB	1/1/36	MXSCDP2516	1450
32+16	1 AC 32A DP MCB +1 DC 16A DP MCB	1/1/36	MXSCDP3216	1450
25+25	1 AC 25A DP MCB +1 DC 25A DP MCB	1/1/36	MXSCDP2525	1450
32+32	1 AC 32A DP MCB +1 DC 32A DP MCB	1/1/36	MXSCDP3232	1450

*DC Fuse holder available on request

AC

- Standard single chip structure, pluggable
- Consist of varistor and thermal disconnection device
- High discharge capacity, quick response
- Double thermal disconnection devices, provide more reliable protection
- Multifunctional terminals for connection of conductors and busbars
- Green window will change when fault occurs, also provide remote alarm terminal at the same time
- Applicable Standard IEC 61643-1 Switching contact T2-AC

DC

- Pluggable module, easy for installation and maintenance
- High discharge capacity, quick response
- Double thermal disconnection devices, provide more reliable protection
- Multifunctional terminals for connection of conductors and busbars
- Green window will change when fault occurs, also provide remote alarm terminal
- Applicable Standard IEC 61643-1



Cat No	Description	MRP (₹) Per Unit
SPD2P0275AC	SPD, 2P, 275V, AC, Type 2	1430
SPD2P0320AC	SPD, 2P, 320V , AC, Type 2	1430
SPD2P0600DC	SPD, 2P, 600V, DC, Type 2	1430
SPD3P1000DC	SPD, 3P, 1000V , DC, Type 2	2610
SPD4P0275AC	SPD, 4P, 275V, AC, Type 2	2640
SPD4P0320AC	SPD, 4P, 320V , AC, Type 2	2640

*SPD with communication port available on request



Combiner Box

Cat No	Description	MRP (₹) Per Unit
DBAC6000	Solar Single Phase ACDB 1 to 6kW, with MCB & SPD in Enclosure	3700
DBDC0500	Solar DCDB 1 IN 1 OUT 500V DC with MCB & SPD, in Enclosure	3880

* Empty Enclosure available on request

Agri Contactors



16 Amps (AC3)

Coil Voltage Band AC 50 Hz	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit	4 Pole Cat No	MRP (₹) Per Unit
88-120V	MS162P00120A	1254	MS163P00120A	1432	MS164P00120A	1645
150-250V	MS162P00250A	1254	—	—	—	—
160-240V	—	—	MS163P00240A	1432	MS164P00240A	1645
170-280V	MS162P00280A	1254	MS163P00280A	1432	MS164P00280A	1645
266-418V	MS162P00418A	1254	MS163P00418A	1432	MS164P00418A	1645
308-484V	MS162P00484A	1254	MS163P00484A	1432	MS164P00484A	1645

25 Amps (AC3)

Coil Voltage Band AC 50 Hz	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit	4 Pole Cat No	MRP (₹) Per Unit
88-120V	MS252P00120A	1397	MS253P00120A	1640	MS254P00120A	2013
150-250V	MS252P00250A	1397	—	—	—	—
160-240V	—	—	MS253P00240A	1640	MS254P00240A	2013
170-280V	MS252P00280A	1397	MS253P00280A	1640	MS254P00280A	2013
266-418V	MS252P00418A	1397	MS253P00418A	1640	MS254P00418A	2013
308-484V	MS252P00484A	1397	MS253P00484A	1640	MS254P00484A	2013

40 Amps (AC3)

Coil Voltage Band AC 50 Hz	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit	4 Pole Cat No	MRP (₹) Per Unit
88-120V	MS402P00120A	2105	MS403P00120A	2547	MS404P00120A	4600
150-250V	MS402P00250A	2105	—	—	—	—
160-240V	—	—	MS403P00240A	2547	MS404P00240A	4600
170-280V	MS402P00280A	2105	MS403P00280A	2547	MS404P00280A	4600
266-418V	MS402P00418A	2105	MS403P00418A	2547	MS404P00418A	4600
308-484V	MS402P00484A	2105	MS403P00484A	2547	MS404P00484A	4600

Spare Coil Cat code

Coil Voltage Band AC 50 Hz	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit	4 Pole Cat No	MRP (₹) Per Unit
88-120V	MS2P120A	610	MS3P120A	857	MS4P120A	857
150-250V	MS2P250A	610	—	—	—	—
160-240V	—	—	MS3P240A	857	MS4P240A	857
170-280V	MS2P280A	610	MS3P280A	857	MS4P280A	857
266-418V	MS2P418A	610	MS3P418A	857	MS4P418A	857
308-484V	MS2P484A	610	MS3P484A	857	MS4P484A	857

Side Mounted Auxiliary Contact Code

Sl.No	Cat No	Configuration	MRP (₹) Per Unit
1	MSSA11	1NO + 1NC	506
2	MSSA10	1NO	374
3	MSSA01	1NC	374
4	MSSA20	2NO	506
5	MSSA02	2NC	506

Definite Purpose(DP) Contactors

salzer



Salzer H2 Series DP Contactors provide high performance with both flexibility and reliability. They are designed to match numerous applications including:

- Air conditioning
- Pumps
- Resistive heating
- Power supplies
- Welding
- Refrigeration equipment
- Food service equipment
- Motors
- Compressors
- Business machines

20 Amps

Coil Voltage Band AC 50 Hz	1 Pole with Shunt Cat No	MRP (₹) Per Unit	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit
19-26.5V	H220S024F5B1	660	H220B024F5B1	880	H220C024F5B1	1177
95-132V	H220S120F5B1	660	H220B120F5B1	880	H220C120F5B1	1177
175-242V	H220S220F5B1	660	H220B220F5B1	880	H220C220F5B1	1177
220-305V	H220S277F5B1	660	H220B277F5B1	880	H220C277F5B1	1177
300-455V	H220S415F5B1	660	H220B415F5B1	880	H220C415F5B1	1177
440-605V	H220S550F5B1	660	H220B550F5B1	880	H220C550F5B1	1177

25 Amps

Coil Voltage Band AC 50 Hz	1 Pole with Shunt Cat No	MRP (₹) Per Unit	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit
19-26 5V	H225S024F5B1	737	H225B024F5B1	913	H225C024F5B1	1320
95-132V	H225S120F5B1	737	H225B124F5B1	913	H225C120F5B1	1320
175-242V	H225S220F5B1	737	H225B220F5B1	913	H225C220F5B1	1320
220-305V	H225S277F5B1	737	H225B277F5B1	913	H225C277F5B1	1320
300-455V	H225S415F5B1	737	H225B415F5B1	913	H225C415F5B1	1320
440-605V	H225S550F5B1	737	H225B550F5B1	913	H225C550F5B1	1320


32 Amps

Coil Voltage Band AC 50 Hz	1 Pole with Shunt Cat No	MRP (₹) Per Unit	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit
19-26 5V	H232S024F5B1	825	H232B024F5B1	941	H232C024F5B1	1705
95-132V	H232S120F5B1	825	H232B120F5B1	941	H232C120F5B1	1705
175-242V	H232S220F5B1	825	H232B220F5B1	941	H232C220F5B1	1705
220-305V	H232S277F5B1	825	H232B277F5B1	941	H232C277F5B1	1705
300-455V	H232S415F5B1	825	H232B415F5B1	941	H232C415F5B1	1705
440-605V	H232S550F5B1	825	H232B550F5B1	941	H232C550F5B1	1705

40 Amps


Coil Voltage Band AC 50 Hz	1 Pole with Shunt Cat No	MRP (₹) Per Unit	2 Pole Cat No	MRP (₹) Per Unit	3 Pole Cat No	MRP (₹) Per Unit
19-26 5V	H240S024F5B1	1210	H240B024F5B1	1672	H240C024F5B1	1969
95-132V	H240S420F5B1	1210	H240B120F5B1	1672	H240C120F5B1	1969
175-242V	H240S220F5B1	1210	H240B220F5B1	1672	H240C220F5B1	1969
220-305V	H240S277F5B1	1210	H240B277F5B1	1672	H240C277F5B1	1969
300-455V	H240S415F5B1	1210	H240B415F5B1	1672	H240C415F5B1	1969
440-605V	H240S550F5B1	1210	H240B550F5B1	1672	H240C550F5B1	1969

Features

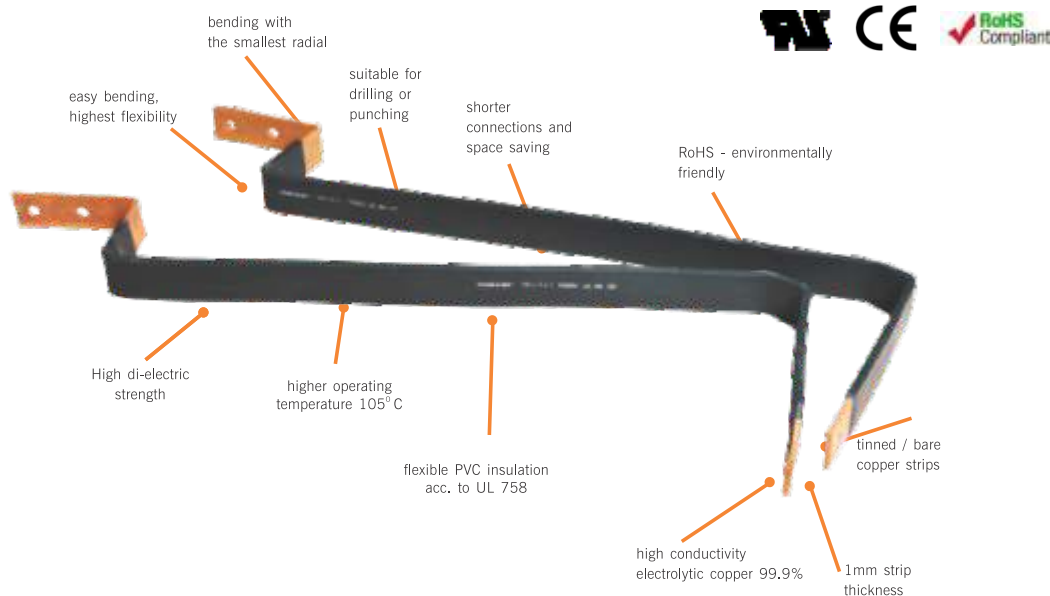

Technical Characteristics:

PRODUCT GROUP	FLEXIBUS
Conductor	
Material	ETP-Cu 99.9%
Strip Thickness Hardness	65 VPN
Conductor Finish	Bare / Tinned
Max. Resistivity @ 20° C	0.0172 ohms.mm ² / m
Rated Nominal Voltage	1000V AC / 1500V DC
Operating Temperature	-50 to 105° C
Insulation	
Material	Special High Flexible TPE / PVC
Flammability	UL 94 V0
Color	Black (Other Colors Optional)
Thickness	≥ 1.6 mm
Dielectric Strength	20 KV/mm
Elongation	> 500%
Halogen Free Rating	IEC@ 60754-1
Low Smoke Rating	IEC@ 61034-2
Smoke, Toxicity and Acidity Rating	IEC@ 60754-2 / UL@ 2885



Temperature rise of Conductor = $T_2 - T_1 = \Delta T$ (K)


Ex: For a current of 630A Passing through a SALZER FELXI BUSBAR

1) $\Delta T = 90 - 40 = 50K$

2) In the 50°C Column, Find the closest current value to
SALZER FLEXI BUSBAR 5 X 32 X 1 – 552650 = 160 mm² - 640A.

3) Select SALZER FLEXI BUS BAR according to the terminal width
Of the equipment being connected

N (No of Layers)	A (mm) (width)	B (mm) (Strip Thickness)	Cross Section (mm ²)	Current rating with Temperature co-efficient ΔT (K) Amp					Current Co-efficient	
				70	60	50	40	30	2	3 & More
3	9	0.8	21.6	158	147	134	120	104	1.72	2.25
2	15.5	0.8	24.8	252	234	212	191	165	1.72	2.25
2	20	1	40	319	292	263	230	193	1.72	2.25
3	20	1	60	396	363	326	286	240	1.72	2.25
4	20	1	80	463	424	381	334	280	1.72	2.25
5	20	1	100	529	485	436	381	321	1.72	2.25
6	20	1	120	580	531	477	418	351	1.72	2.25
8	20	1	160	700	641	576	504	423	1.72	2.25
10	20	1	200	801	733	660	578	485	1.72	2.25
2	24	1	48	370	339	305	267	224	1.72	2.25
3	24	1	72	486	444	400	351	294	1.72	2.25
4	24	1	96	541	495	445	389	327	1.72	2.25
5	24	1	120	612	561	504	442	370	1.72	2.25
6	24	1	144	717	656	590	517	434	1.72	2.25
8	24	1	192	779	713	641	562	471	1.72	2.25
10	24	1	240	883	809	727	637	534	1.72	2.25
2	32	1	64	496	455	410	358	300	1.72	2.25
3	32	1	96	618	566	509	446	374	1.72	2.25
4	32	1	128	624	624	561	491	413	1.72	2.25
5	32	1	160	768	704	633	554	465	1.72	2.25
6	32	1	192	862	789	710	622	522	1.72	2.25
8	32	1	256	1017	926	821	720	604	1.72	2.25
10	32	1	320	1207	1106	982	870	730	1.72	2.25
2	40	1	80	602	552	496	434	365	1.72	2.25
3	40	1	120	743	680	612	535	450	1.72	2.25
4	40	1	160	820	751	675	592	496	1.72	2.25
5	40	1	200	972	889	800	700	588	1.72	2.25
6	40	1	240	1014	929	835	731	613	1.72	2.25
8	40	1	320	1263	1156	1040	910	764	1.72	2.25
10	40	1	400	1279	1171	1053	922	774	1.72	2.25
3	50	1	150	852	781	702	614	515	1.72	2.25
4	50	1	200	987	904	813	712	597	1.72	2.25
5	50	1	250	1106	1012	911	797	669	1.72	2.25
6	50	1	300	1216	1114	1002	876	736	1.72	2.25
8	50	1	400	1404	1286	1157	1013	850	1.72	2.25
10	50	1	500	1576	1443	1298	1136	954	1.72	2.25
3	63	1	189	1101	1009	907	794	666	1.65	2.12
4	63	1	252	1269	1162	1046	916	768	1.65	2.12
5	63	1	315	1288	1179	1061	929	779	1.65	2.12
6	63	1	378	1543	1413	1270	1112	934	1.65	2.12
8	63	1	504	1774	1625	1462	1279	1073	1.65	2.12
10	63	1	630	1958	1792	1613	1411	1185	1.65	2.12
3	80	1	240	1355	1241	1116	977	820	1.65	2.12
4	80	1	320	1554	1423	1280	1121	941	1.65	2.12
5	80	1	400	1724	1579	1420	1243	1043	1.65	2.12
6	80	1	480	1865	1709	1536	1345	1129	1.65	2.12
8	80	1	640	1948	1784	1604	1405	1179	1.65	2.12
10	80	1	800	2258	2068	1860	1629	1366	1.65	2.12

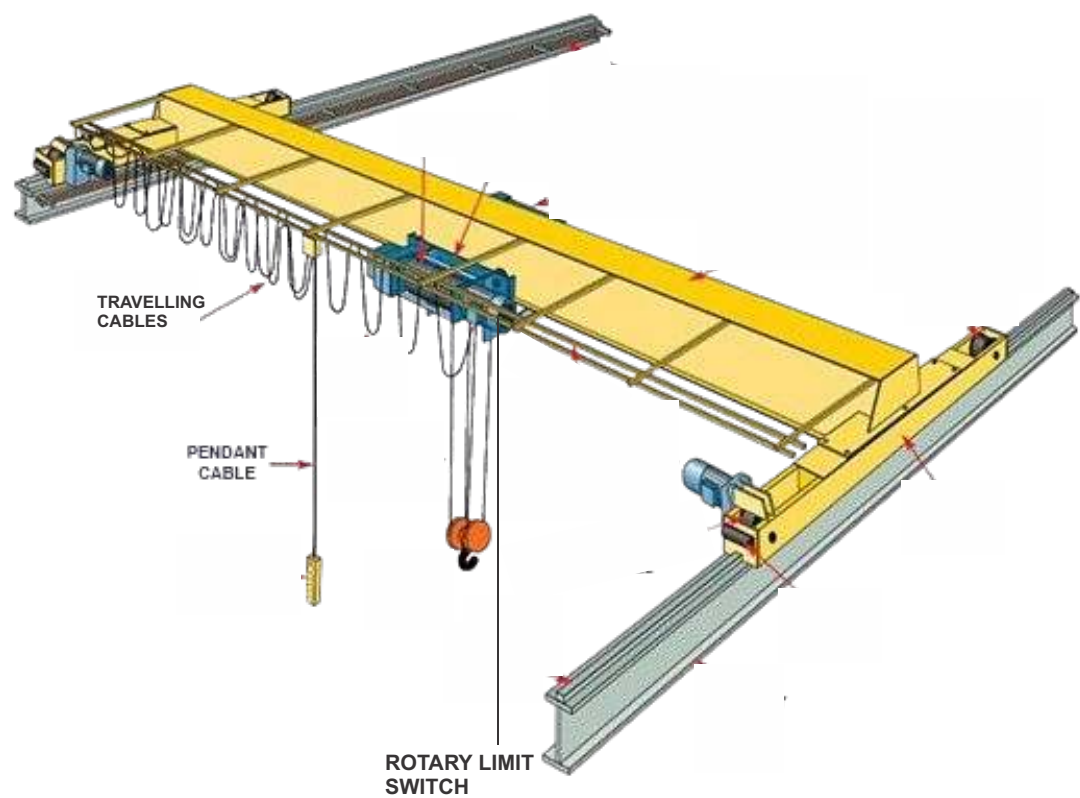

ROTARY LIMIT SWITCH



Ratio: 1:50, 1:100, 1:200 & 1:400
No. of Poles : 2NO+2NC or 4NO+4NC
Shaft Size : 12mm
Protection Degree : IP65
Rated Voltage : 230V
Rated Current : 10A

2TY/PENDANT CABLES



Temperature : Upto 70°
No of Cores : 1.5sq mm x 3,6,10,12,16,18 & 24
Construction : PVC Insulation, Oil Resistant
Yellow/Black PVC Jacket
Supporting Element : Galvanized Round Steel Wire

FLAT TRAVELLING CABLE



Conductor Stranded Copper Wire According to VDE 0295 Class 5 / IEC 60228 Class 5 Insulation PVC T12 According to EN 50363 Part 3 Jacket PVCTM2 According to EN 50363 - 4 - 1
No of Cores : 0.5sq mm x 12/24
0.75sq mm X 12/24

FLAT CRANE CABLE



Conductor : Multi Stranded Copper Conductor as per DIN EN 60228
Insulation : PVC T12 According to EN 50363 Part 3
Temperature Range : - 40°C to +70°C
Jacket : PVC TM2 According to EN 50363 - 4 - 1
Temperature Range : - 40°C to + 70°C
No. of Cores : 4G X1.5sqmm,2.5sqmm,4sqmm,6sqmm, 10sqmm,16sqmm,25sqmm,35sqmm & 50sqmm
8G X 1.5sqmm & 2.5sqmm
12GX1.5sqmm & 2.5sqmm & 13GX1.5sqmm

Other Products



Toroidal Transformers / Current Transformers

Single Phase 15VA - 30KVA & Three Phase
1KVA - 120KVA. CT's : Accuracy Class of 0.2 to 3
with burden of 5 to 30VA, Primary Current upto
4000A & Secondary of 5A / 1A



Transformers & Chokes / Inductors / Reactors

Dry type Magnetics - VPI, AN - AF - Water Cooling etc.
Transformers Range: 1KVA to 1MVA, 1Phase and 3Phase

Chokes / Inductors / Reactors Range:
1KVA to 1MVA 1Phase and 3 Phase



Wires & Cables - Wire Harness / Power Cords

Range from 0.5 sq mm to 300 sq mm
Building Wires, Flexible Wires, Multi Core Cables,
Flat Cables, HFFR, FRLS, ZHFR Wires, UL Rated Wires,
Shielded & Braided Wires

Bunched Conductors, Tinned Copper wires &
Customised cables.
Wire Harness for: Industrial Applications,
Consumer Electronics, Automobile Industries, Medical
Electronics.



LAN Cables & CCTV Cables

Horizontal Cable specification testing Lab

UL Listed - CM Flame Rating

ETL verified to ANSI / TIA-568.2-D Cat6

FR PVC, ROHS & REACH Compliance

Shielded / Unshielded Cat5e, Cat6, Cat6A & Cat7

CCTV Cables - for High performance Hybrid Data

Transfer offered in 3+1 & 4+1 type



MCB'S & Distribution Boards

MCB's are offered in various current ratings
from 0.5 to 63 Amps. Enclosures, Plug & Sockets,
Single Phase DB, Three Phase DB, Vertical DB,
Phase Selector DB, 7 & 8 Segment DB's etc.



Sensors

Speed Sensors : Active/Passive Sensors with Speed range
upto 30,000 rpm in Square/Sine wave output.

Position Sensors : Active/Passive Sensors with Rotation angle
0-90/0-180 & 0-360 with Analogue/Resistive output signal

Temperature Sensors : NTC/PTC types with Resistive
output signal

Pressure Sensors : Absolute/Relative pressure from
0 to 1000 bar with Ratiometric

Voltage/current output signal, with different ingress
protection of IP65/IP67/IP69K



SPD

Combiner Box

DC MCBs

SOLAR PRODUCTS

SPD : AC (2P/4P - 320V), DC : 2P-600V, 3P-1000V
IEC 61643-1 Switching Contact T2-AC

COMBINER BOX : Single Phase ACDB 1 to 6kW
DCDB 1 IN 1 OUT 500V DC

DC MCB : 6kA as per IEC 60947-2
1P-250V DC, 2P-500V DC & 4P-1000V DC



SMART METER

1 Phase : 5-30 / 10 - 60A smart meter
with GPRS/RF/NB - IOT communication with
DLMS Compliance

3 Phase WC 10 - 60/ 20 - 100Amps smart meter
with GPRS/RF/NB - IOT communication with DLMS
Compliance

3 Phase LT-CT - 5A smart meter with
GPRS/RF/NB - IOT communication with DLMS
Compliance



DC Fast Chargers

AC EV Chargers

EV CHARGERS

AC Charger - 3.3, 10, 14, 7.4, 15 & 22kW

DC Charger - 60, 90, 120, 240 & 360kW

Charging method through RF ID and Wallet.



Guarantee :

All prices are maximum retail price basis inclusive GST and any other Tax as applicable.

All the products listed in the price list carry a warranty, against manufacturing defects for a period of 18* months from the date of purchase.

The warranty is however subject to provision of proper usage, effective maintenance, it does not cover faulty operation and willful or accidental damage.

The user needs to take adequate precautions to eliminate these conditions. The manufacturer shall not be liable for any consequential loss, injury or damages attributable to defect or failure of its products.

Product development is a continuous process and hence data / prices given are subject to change without notice. Disputes if any are subject to Coimbatore jurisdiction only.

Salzer Electronics Limited

Samichettipalayam, Jothipuram Post, Coimbatore 641047. INDIA

Tel : +91-422- 4233600 | e-mail : sales@salzergroup.com

For Product Enquiries ☎ **1800 1030 161**

www.salzergroup.com